Many different ways to draw two parallel lines

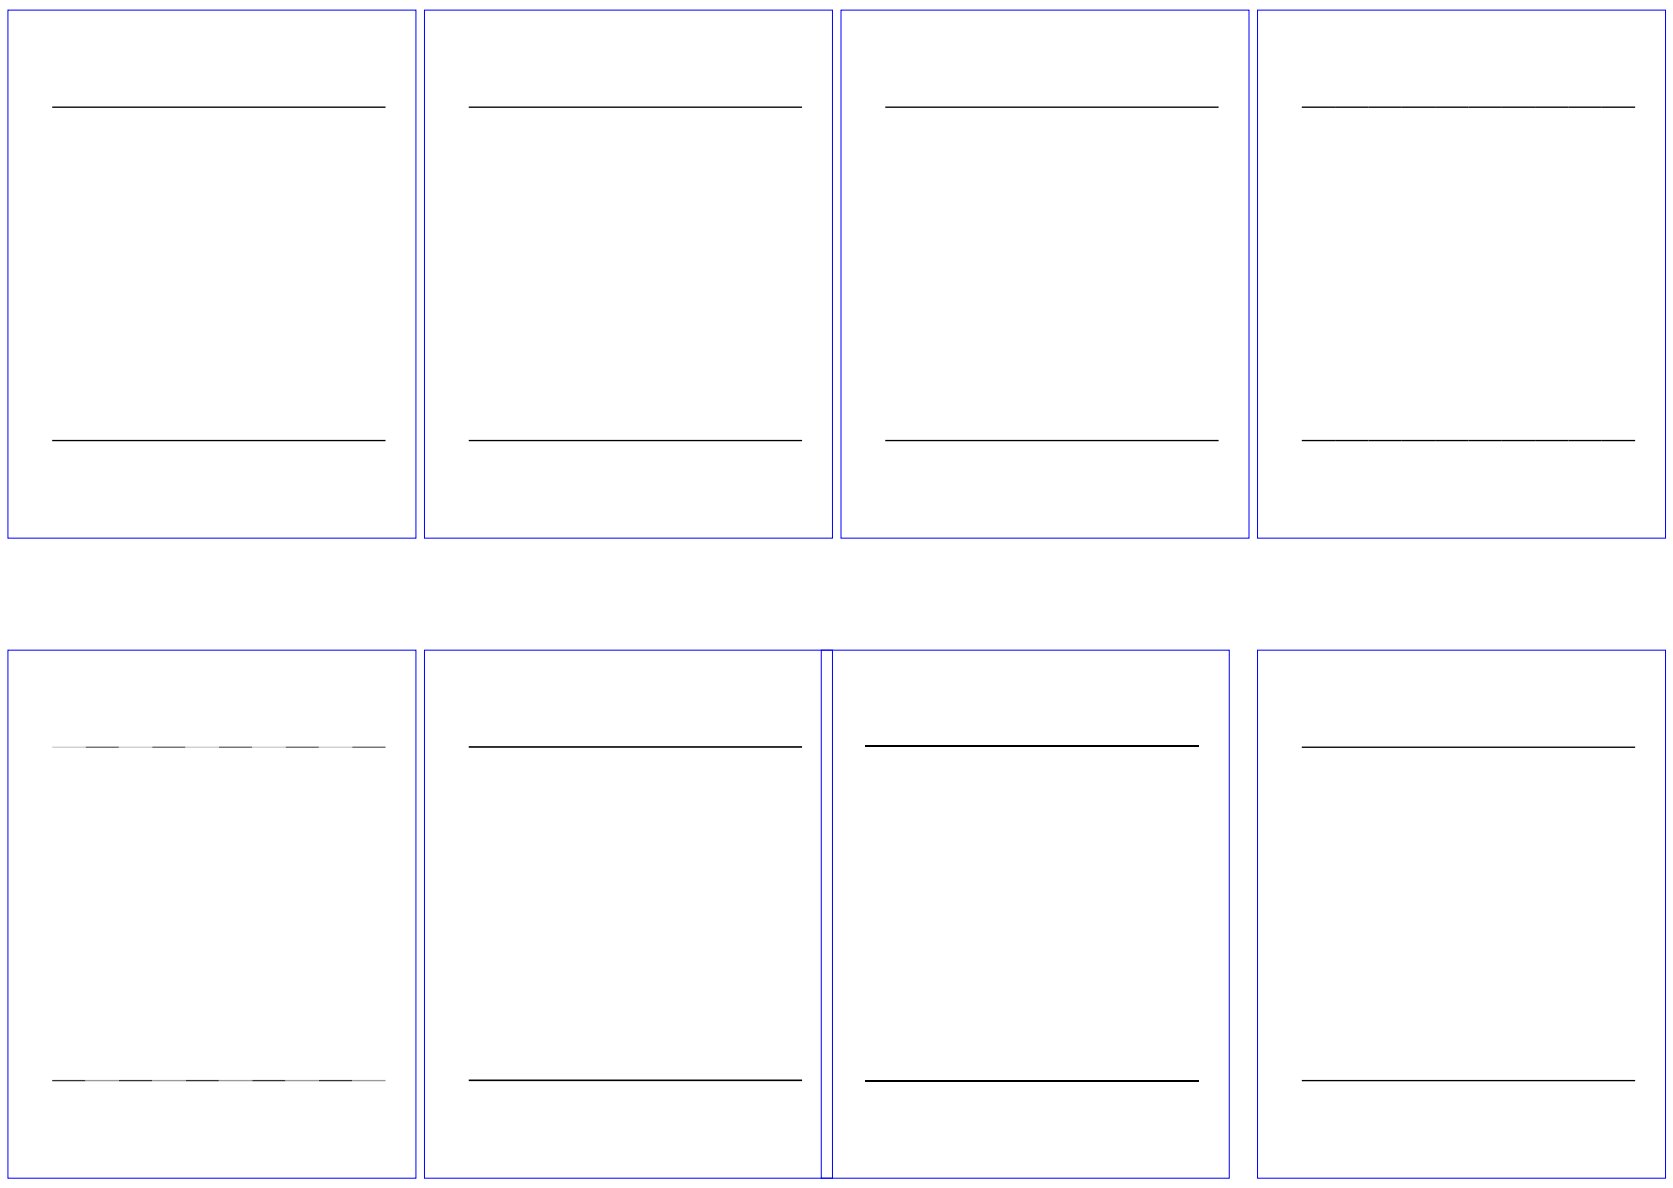

These look alike and have vastly different PostScript language codes.

Examples

Just a little PostScript

Randolph J. Herber, herber@fnal.fnal.gov, 1 630 840 2966 CDF PK149O
Computing Division/Operating System Support/CDF Task Force
P.O. Box 500, Mail Stop 234 (WH6W), Batavia, IL 60510

Fermilab

```
==> Q1.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate 2 setlinewidth
 0 0 moveto 500 0 rlineto stroke
 0 500 moveto 500 0 rlineto stroke
 showpage

==> Q2.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate 2 setlinewidth
 0 0 moveto gsave 0 500 moveto 500 0 rlineto stroke
 grestore 500 0 rlineto stroke
 showpage

==> Q3.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate 2 setlinewidth [500] 0 setdash
 0 0 moveto 500 0 rlineto 0 500 rlineto -500 0 rlineto
 closepath stroke
 showpage

==> Q4.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate 2 setlinewidth [50] 0 setdash
 0 0 moveto 500 0 rlineto stroke
 500 500 moveto -500 0 rlineto stroke
 500 0 moveto -500 0 rlineto stroke
 0 500 moveto 500 0 rlineto stroke
 showpage

==> Q5.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate 2 setlinewidth [50] 0 setdash
 .2 setgray 0 0 moveto 500 0 rlineto stroke
 .4 setgray 500 500 moveto -500 0 rlineto stroke
 .6 setgray 500 0 moveto -500 0 rlineto stroke
 .8 setgray 0 500 moveto 500 0 rlineto stroke
 showpage

==> Q6.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate /B {bind def} dup exec /E {exch def} B
 /Box {/W E /H E moveto
       W 0 rlineto 0 H rlineto W neg 0 rlineto closepath} B
 0 -1 2 500 Box 0 499 2 500 Box fill
 showpage

==> Q7.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate /B {bind def} dup exec /E {exch def} B
 /Box {/W E /H E moveto
       W 0 rlineto 0 H rlineto W neg 0 rlineto closepath} B
 0 -1 502 500 Box fill 1 setgray 0 1 498 500 Box fill
 showpage

==> Q8.ps <==
 %!PS-Adobe-3.0 EPSF-3.0
 %%BoundingBox: 55 145 557 647
 %%Pages: 1
 %%EndComments
 66 146 translate 2 setlinewidth [5] 0 setdash newpath
 500 0 0 0 -500 0 500 500 -500 0 500 0 500 0 0 500
 4 {moveto rlineto} bind repeat stroke
 showpage
```